

FINAL EXAM
CSCI 127: Introduction to Computer Science
Hunter College, City University of New York
Version 01

December 16, 2024

Exam Rules

- Show all your work. Your grade will be based on the work shown.
- The exam is closed-book and closed-notes.
- When taking the exam, you may have pens, pencils, and an 8 1/2" x 11" piece of paper filled with notes, programs, etc.
- You may not use a computer, calculator, tablet, smartwatch, or other electronic device.
- Do not open this exam until instructed to do so.

Hunter College regards acts of academic dishonesty (e.g., plagiarism, cheating on examinations, obtaining unfair advantage, and falsification of records and official documents) as serious offenses against the values of intellectual honesty. The College is committed to enforcing the CUNY Policy on Academic Integrity and will pursue cases of academic dishonesty according to the Hunter College Academic Integrity Procedures.

| |
|---|
| I understand that all cases of academic dishonesty will be reported to the Dean of Students and will result in sanctions. |
|---|

| |
|-------|
| Name: |
|-------|

| |
|--------|
| EmpID: |
|--------|

| |
|------------|
| Signature: |
|------------|

ASCII TABLE

| Decimal | Hex | Char | Decimal | Hex | Char | Decimal | Hex | Char | Decimal | Hex | Char |
|---------|-----|------------------------|---------|-----|---------|---------|-----|------|---------|-----|-------|
| 0 | 0 | [NULL] | 32 | 20 | [SPACE] | 64 | 40 | @ | 96 | 60 | ` |
| 1 | 1 | [START OF HEADING] | 33 | 21 | ! | 65 | 41 | A | 97 | 61 | a |
| 2 | 2 | [START OF TEXT] | 34 | 22 | " | 66 | 42 | B | 98 | 62 | b |
| 3 | 3 | [END OF TEXT] | 35 | 23 | # | 67 | 43 | C | 99 | 63 | c |
| 4 | 4 | [END OF TRANSMISSION] | 36 | 24 | \$ | 68 | 44 | D | 100 | 64 | d |
| 5 | 5 | [ENQUIRY] | 37 | 25 | % | 69 | 45 | E | 101 | 65 | e |
| 6 | 6 | [ACKNOWLEDGE] | 38 | 26 | & | 70 | 46 | F | 102 | 66 | f |
| 7 | 7 | [BELL] | 39 | 27 | ' | 71 | 47 | G | 103 | 67 | g |
| 8 | 8 | [BACKSPACE] | 40 | 28 | (| 72 | 48 | H | 104 | 68 | h |
| 9 | 9 | [HORIZONTAL TAB] | 41 | 29 |) | 73 | 49 | I | 105 | 69 | i |
| 10 | A | [LINE FEED] | 42 | 2A | * | 74 | 4A | J | 106 | 6A | j |
| 11 | B | [VERTICAL TAB] | 43 | 2B | + | 75 | 4B | K | 107 | 6B | k |
| 12 | C | [FORM FEED] | 44 | 2C | , | 76 | 4C | L | 108 | 6C | l |
| 13 | D | [CARRIAGE RETURN] | 45 | 2D | - | 77 | 4D | M | 109 | 6D | m |
| 14 | E | [SHIFT OUT] | 46 | 2E | . | 78 | 4E | N | 110 | 6E | n |
| 15 | F | [SHIFT IN] | 47 | 2F | / | 79 | 4F | O | 111 | 6F | o |
| 16 | 10 | [DATA LINK ESCAPE] | 48 | 30 | 0 | 80 | 50 | P | 112 | 70 | p |
| 17 | 11 | [DEVICE CONTROL 1] | 49 | 31 | 1 | 81 | 51 | Q | 113 | 71 | q |
| 18 | 12 | [DEVICE CONTROL 2] | 50 | 32 | 2 | 82 | 52 | R | 114 | 72 | r |
| 19 | 13 | [DEVICE CONTROL 3] | 51 | 33 | 3 | 83 | 53 | S | 115 | 73 | s |
| 20 | 14 | [DEVICE CONTROL 4] | 52 | 34 | 4 | 84 | 54 | T | 116 | 74 | t |
| 21 | 15 | [NEGATIVE ACKNOWLEDGE] | 53 | 35 | 5 | 85 | 55 | U | 117 | 75 | u |
| 22 | 16 | [SYNCHRONOUS IDLE] | 54 | 36 | 6 | 86 | 56 | V | 118 | 76 | v |
| 23 | 17 | [ENG OF TRANS. BLOCK] | 55 | 37 | 7 | 87 | 57 | W | 119 | 77 | w |
| 24 | 18 | [CANCEL] | 56 | 38 | 8 | 88 | 58 | X | 120 | 78 | x |
| 25 | 19 | [END OF MEDIUM] | 57 | 39 | 9 | 89 | 59 | Y | 121 | 79 | y |
| 26 | 1A | [SUBSTITUTE] | 58 | 3A | : | 90 | 5A | Z | 122 | 7A | z |
| 27 | 1B | [ESCAPE] | 59 | 3B | ; | 91 | 5B | [| 123 | 7B | { |
| 28 | 1C | [FILE SEPARATOR] | 60 | 3C | < | 92 | 5C | \ | 124 | 7C | |
| 29 | 1D | [GROUP SEPARATOR] | 61 | 3D | = | 93 | 5D |] | 125 | 7D | } |
| 30 | 1E | [RECORD SEPARATOR] | 62 | 3E | > | 94 | 5E | ^ | 126 | 7E | ~ |
| 31 | 1F | [UNIT SEPARATOR] | 63 | 3F | ? | 95 | 5F | _ | 127 | 7F | [DEL] |

1. (a) **What will the following Python code print?** *Note that each section is run sequentially, so the commands from part i will affect part ii and so on.*

i. `apples = "Gala@Granny Smith"`
`print(apples.find("@"))`

Output:

4

ii. `apples += "@Honeycrisp@"`
`aList = apples.split("@")`
`print(len(aList))`

Output:

4

iii. `low = aList[1].lower()`
`print(ord(low[0]))`

Output:

103

iv. `for apple in aList:`
`print(apple.count("G"))`

Output:

1
1
0

- (b) Consider the contents of the current directory, `/Users/Alice`:

```
lemon.csv  lime.txt  orange.py  clementine.py  citrus
```

Note that each section is run sequentially, so the commands from part i will affect part ii and so on.

- i. What is the output for:

```
$ ls *m*
```

Output:

```
lemon.csv  lime.txt
clementine.py
```

- ii. What is the output for:

```
$ mv *.py ./citrus
$ ls
```

Output:

```
lemon.csv  lime.txt
citrus
```

- iii. What is the output for:

```
$ cd ../
$ pwd
```

Output:

Users

2. Complete the Python program below that creates an image of a topographic map based on elevation levels.

First, ask the user to enter a value representing an amount of green. This value will be in the range [0.0, 1.0].

Then, color the pixels of the image as follows:

If the elevation is less than or equal to 0, color the pixel the amount of green the user specified.

If the elevation is greater than 0 but less than 20, color the pixel white.

Otherwise, the pixel should be colored black.

```
import numpy as np
import matplotlib.pyplot as plt

elevations = np.loadtxt("elevationsNYC.txt")

mapShape = elevations.shape + (3,)
topoMap = np.zeros(mapShape)

#YOUR CODE HERE
```

```
g = float(input("Enter green: "))
for i in range(mapShape[0]):
    for j in range(mapShape[1]):
        if elevations[i,j] <= 0:
            topoMap[i,j,1] = g
        elif elevations[i,j] < 20:
            topoMap[i,j,:] = 1.0
        else:
            topoMap[i,j,:] = 0.0
```


3. (a) Select the correct option.
- What color is tina after this command? `tina.color("#333333")`
 green gray white red blue
 - Select the SMALLEST binary number:
 1011 1100 1111 0010 1001
 - Select the LARGEST hexadecimal number:
 16 8A A1 D1 D3
 - What is the binary number equivalent to the decimal number 27?
 01111 11011 11101 10111 10111
 - What is the hexadecimal number equivalent to the decimal number 27?
 1A 1B 1C 1D 1E

- (b) i. What is the value (True/False):

in1 = False
 A. in2 = False
 out = True
 out = (in1 and in2) or not in2

in1 = True
 B. in2 = True
 out = False
 out = not (in1 and (in2 and in2))

in1 = False
 C. in2 = True or in1
 in3 = (in1 or in2) and True
 out = False
 out = not (in2 and in3)

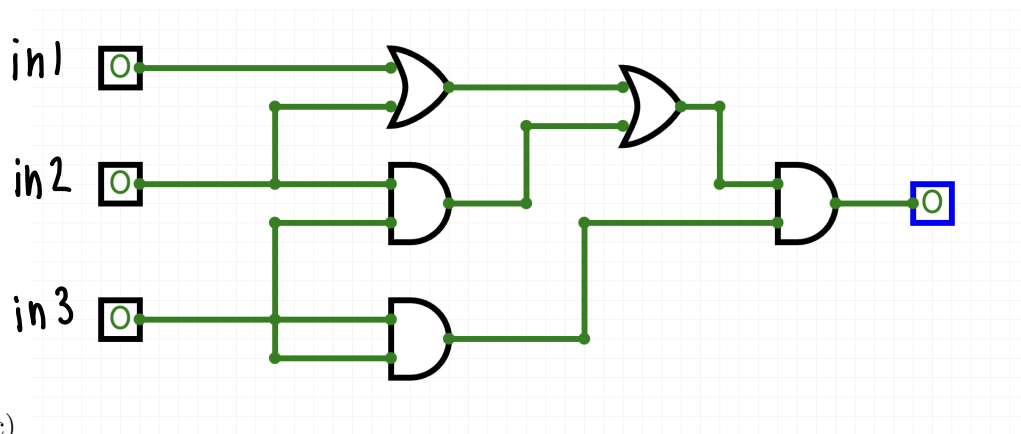


(c)

Write the logical expression that represents the circuit shown above.

$$\text{out} = (\text{in1 or in2}) \text{ and } (\text{in2 and in3})$$

(d) Draw a circuit that implements the logical expression:

$$\text{out} = (\text{in1 or not (in2 or in3)}) \text{ and } (\text{in3})$$

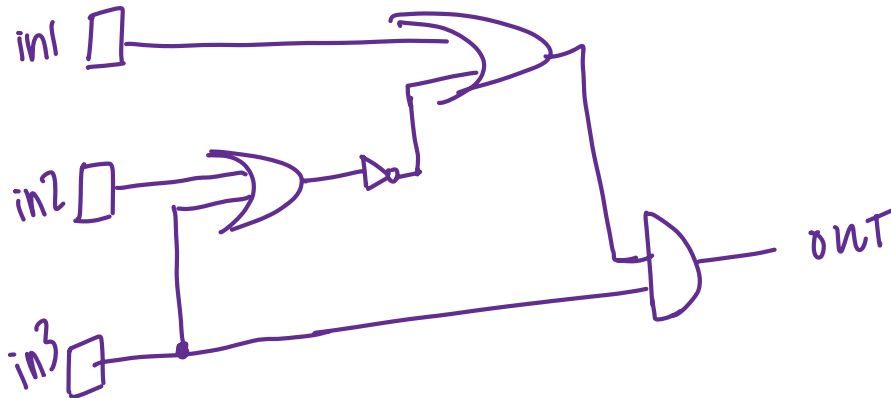

4. Write a Python program to make a turtle walk 200 times. Each “walk” is 100 steps forward. The turtle should turn right [0, 90, 180, 270] degrees (chosen randomly) at the beginning of each walk.

```
import turtle
import random

tina = turtle.Turtle()

for i in range(200):
    deg = random.randrange(0, 271, 90)
    tina.right(deg)
    tina.forward(100)
```

5. Consider the following dataset:

| TEMP | LUM | RADIUS | COLOR | TYPE |
|-------|----------|--------|--------|-------------|
| 400 | 0.0005 | 79 | Red | Brown Dwarf |
| 1482 | 0.0024 | 55 | Orange | Brown Dwarf |
| 18489 | 59302134 | 65723 | Blue | Hypergiant |
| 14553 | 47821947 | 102.34 | Blue | Hypergiant |

Assume this data is stored in `stars.csv`

- (a) Write a Python program that finds the **coldest** star in the dataset and prints its temperature in Fahrenheit. The temperature data is originally in Kelvin. The formula to convert Kelvin to Fahrenheit is $F = \frac{9}{5}(K - 273.15) + 32$, where K is the degrees in Kelvin and F is the degrees in Fahrenheit.

```
import pandas as pd
df = pd.read_csv("stars.csv")
coldest = df["TEMP"].min()
F = 9/5 * (coldest - 273.15) + 32
print("Coldest star", F)
```

- (b) Write a Python program that prints the average radius of stars that are "Blue" in color.

```
import pandas as pd
df = pd.read_csv("stars.csv")
blues = df.groupby("COLOR").get_group("Blue")
avgRadius = blues["RADIUS"].mean()
print("Avg radius of blue stars:", avgRadius)
```


6. Consider the following main function:

```
import matplotlib.pyplot as plt
import numpy as np

def main():
    # displays an all-red image with a height of 50 and width of 100
    customImg(50,100,0)
```

Define the function below:

```
def customImg(h, w, color):
    # 1. Create an image with h rows and w columns
    # 2. If the color parameter is not 0, 1, or 2, print "Invalid color channel."
    # 3. Otherwise, modify the image such that all pixels become the color entered
    # 4. Display the image
```

```
#1. Create image
img = np.zeros((h,w,3))
# 2. Check color parameter
if color != 0 or color != 1 or color != 2:
    print("Invalid color channel")
#3. Modify image
else:
    img[:, :, color] = 1.0
#4. Display image
plt.imshow(img)
plt.show()
```

7. Write a complete Python program that asks the user for the name of an image file and prints the number of mostly red pixels in that image. A pixel is mostly red if the amount of green and blue are both below 0.25 and the amount of red is above 0.75.

```
import numpy as np
import matplotlib.pyplot as plt

filename = input("Enter filename: ")
img = plt.imread(filename)

count = 0
for i in range(img.shape[0]):
    for j in range(img.shape[1]):
        r, g, b = (img[i,j,0], img[i,j,1], img[i,j,2])

        if r > 0.75 and g < 0.25 and b < 0.25:
            count += 1

print("Number of mostly red pixels:", count)
```

8. (a) Consider the following MIPS program:

```
ADDI $s1, $zero, 200
ADD $s2, $s1, $s1
ADDI $s2, $s2, 100
ADDI $s3, $s2, 50
```

After the program runs, what is the value stored in:

- i. register \$s1

200

- ii. register \$s2

500

- iii. register \$s3

550

- (b) What is the output for a run of this MIPS program:

Output:

BCDE

```
#Loop through four letters:
ADDI $sp, $sp, -5           # Set up stack
ADDI $t0, $zero, 66        # Start $t0 at 66 (B)
ADDI $s2, $zero, 70        # Use to test when you reach 70 (F)
SETUP: SB $t0, 0($sp)      # Next letter in $t0
ADDI $sp, $sp, 1           # Increment the stack
ADDI $t0, $t0, 1           # Increment the letter
BEQ $t0, $s2, DONE         # Jump to done if $t0 == 70
J SETUP                     # If not, jump back to SETUP for loop
DONE: ADDI $t0, $zero, 0    # Null (0) to terminate string
SB $t0, 0($sp)             # Add null to stack
ADDI $sp, $sp, -4          # Set up stack to print
ADDI $v0, $zero, 4         # 4 is for print string
ADDI $a0, $sp, 0           # Set $a0 to stack pointer for printing
syscall                    # print to the log
```

9. Translate the following Python program into a complete C++ program:

```
myString = input("Enter a string: ")
numChars = len(myString)
idx = numChars // 2
print("Middle:")
if numChars % 2 == 0:
    print(idx-1, idx)
else:
    print(idx)
```

```
#include <iostream>
#include <string>
using namespace std;
```

```
int main() {
```

```
    cout << "Enter string";
    string myString;
    cin >> myString;
    int numChars;
    numChars = myString.length();
    int idx = numChars / 2;
    cout << "Middle\n";
    if (numChars % 2 == 0) {
        cout << idx-1 << " " << idx << "\n";
    } else {
        cout << idx << "\n";
    }
}
```

```
    return 0;
}
```

10. Write a program in C++ that outputs the numbers from 1 to a user-specified integer. The program should follow these rules:

For each number in the range,

- If the number is divisible by both 3 and 5, print "FizzBuzz"
- If the number is divisible by 3, print "Fizz"
- If the number is divisible by 5, print "Buzz"
- For all other numbers, print the number itself

```
#include <iostream>
using namespace std;
```

```
int main() {
    int N;
    cin >> N;

    for (int i = 1; i <= N; i++) {
```

```
        if (i % 3 == 0 && i % 5 == 0) {
            cout << "Fizz Buzz";
        } else if (i % 3 == 0) {
            cout << "Fizz";
        } else if (i % 5 == 0) {
            cout << "Buzz";
        } else {
            cout << i;
        }
    }
```

```
    } //loop end

    return 0;
}
```