


# CSci 127: Introduction to Computer Science

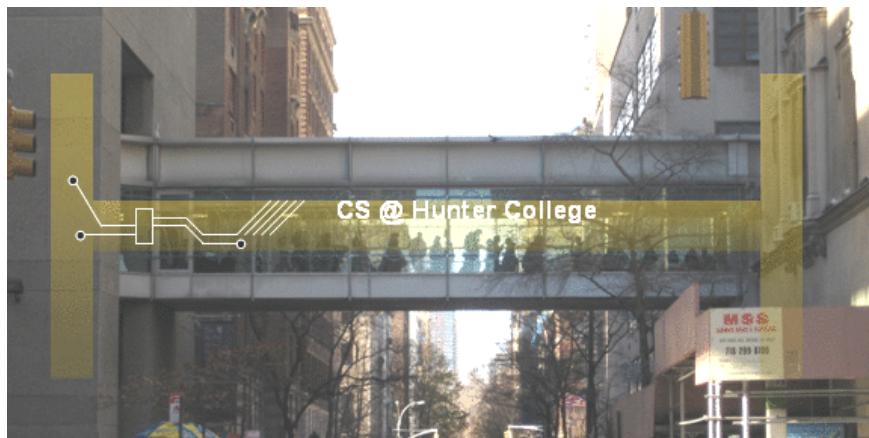

[hunter.cuny.edu/csci](http://hunter.cuny.edu/csci)

# Frequently Asked Questions

From email

# Frequently Asked Questions

From email

- **Can I earn extra credit?**

# Frequently Asked Questions

From email

- **Can I earn extra credit?**

*No. This course does not have extra credit. However, completing Quizzes and Participating in class will only help your grade!*

# Frequently Asked Questions

From email

- **Can I earn extra credit?**  
*No. This course does not have extra credit. However, completing Quizzes and Participating in class will only help your grade!*
- **What is pseudocode? Why do we use it?**

# Frequently Asked Questions

From email

- **Can I earn extra credit?**

*No. This course does not have extra credit. However, completing Quizzes and Participating in class will only help your grade!*

- **What is pseudocode? Why do we use it?**

*Pseudocode is the “informal high-level description of the operating principle of a computer program or other algorithm.”*

# Frequently Asked Questions

From email

- **Can I earn extra credit?**

*No. This course does not have extra credit. However, completing Quizzes and Participating in class will only help your grade!*

- **What is pseudocode? Why do we use it?**

*Pseudocode is the “informal high-level description of the operating principle of a computer program or other algorithm.”*

*We use it to write down the ideas, before getting deep into the details.*

# Frequently Asked Questions

From email

- **Can I earn extra credit?**

*No. This course does not have extra credit. However, completing Quizzes and Participating in class will only help your grade!*

- **What is pseudocode? Why do we use it?**

*Pseudocode is the “informal high-level description of the operating principle of a computer program or other algorithm.”*

*We use it to write down the ideas, before getting deep into the details.*

- **What are types of variables?**



# Frequently Asked Questions

From email

- **Can I earn extra credit?**

*No. This course does not have extra credit. However, completing Quizzes and Participating in class will only help your grade!*

- **What is pseudocode? Why do we use it?**

*Pseudocode is the “informal high-level description of the operating principle of a computer program or other algorithm.”*

*We use it to write down the ideas, before getting deep into the details.*

- **What are types of variables?**

*Different kinds of information takes different amounts of space.*

*Types we have seen so far: int, float, str and objects (e.g. turtles).*

# Frequently Asked Questions

From email

- **Can I earn extra credit?**

*No. This course does not have extra credit. However, completing Quizzes and Participating in class will only help your grade!*

- **What is pseudocode? Why do we use it?**

*Pseudocode is the “informal high-level description of the operating principle of a computer program or other algorithm.”*

*We use it to write down the ideas, before getting deep into the details.*

- **What are types of variables?**

*Different kinds of information takes different amounts of space.*

*Types we have seen so far: int, float, str and objects (e.g. turtles).*

- **How can I tell strings from variables?**

# Frequently Asked Questions

From email

- **Can I earn extra credit?**

*No. This course does not have extra credit. However, completing Quizzes and Participating in class will only help your grade!*

- **What is pseudocode? Why do we use it?**

*Pseudocode is the “informal high-level description of the operating principle of a computer program or other algorithm.”*

*We use it to write down the ideas, before getting deep into the details.*

- **What are types of variables?**

*Different kinds of information takes different amounts of space.*

*Types we have seen so far: int, float, str and objects (e.g. turtles).*

- **How can I tell strings from variables?**

*Strings are surrounded by quotes (either single or double).*

# Frequently Asked Questions

From email

- **Can I earn extra credit?**

*No. This course does not have extra credit. However, completing Quizzes and Participating in class will only help your grade!*

- **What is pseudocode? Why do we use it?**

*Pseudocode is the “informal high-level description of the operating principle of a computer program or other algorithm.”*

*We use it to write down the ideas, before getting deep into the details.*

- **What are types of variables?**

*Different kinds of information takes different amounts of space.*

*Types we have seen so far: int, float, str and objects (e.g. turtles).*

- **How can I tell strings from variables?**

*Strings are surrounded by quotes (either single or double).*

*Variables names (identifiers) for memory locations are not.*

# Frequently Asked Questions

From email

- **Can I earn extra credit?**

*No. This course does not have extra credit. However, completing Quizzes and Participating in class will only help your grade!*

- **What is pseudocode? Why do we use it?**

*Pseudocode is the “informal high-level description of the operating principle of a computer program or other algorithm.”*

*We use it to write down the ideas, before getting deep into the details.*

- **What are types of variables?**

*Different kinds of information takes different amounts of space.*

*Types we have seen so far: int, float, str and objects (e.g. turtles).*

- **How can I tell strings from variables?**

*Strings are surrounded by quotes (either single or double).*

*Variables names (identifiers) for memory locations are not. Ex: 'num' vs. num.*

# Today's Topics



- Recap: Decisions
- Logical Expressions
- Circuits
- Binary Numbers

# Today's Topics



- **Recap: Decisions**
- Logical Expressions
- Circuits
- Binary Numbers

# Challenge

*Some challenges with types & decisions:*

```
#What are the types:
```

```
y1 = 2017
y2 = "2018"
print(type(y1))
print(type("y1"))
print(type(2017))
print(type("2017"))
print(type(y2))
print(type(y1/4.0))
```

```
x = int(y2) - y1
if x < 0:
    print(y2)
else:
    print(y1)
```

```
cents = 432
dollars = cents // 100
change = cents % 100
if dollars > 0:
    print('$'+str(dollars))
if change > 0:
    quarters = change // 25
    pennies = change % 25
    print(quarters, "quarters")
    print("and", pennies, "pennies")
```



# Python Tutor

```
#What are the types:
```

```
y1 = 2017
```

```
y2 = "2018"
```

```
print(type(y1))
```

```
print(type("y1"))
```

```
print(type(2017))
```

```
print(type("2017"))
```

```
print(type(y2))
```

```
print(type(y1/4.0))
```

```
x = int(y2) - y1
```

```
if x < 0:
```

```
    print(y2)
```

```
else:
```

```
    print(y1)
```

(Demo with pythonTutor)

# Decisions


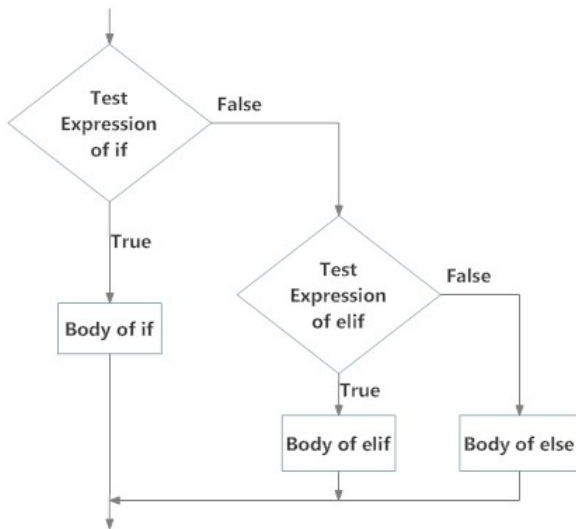


Fig: Operation of if...elif...else statement

# Side Note: Reading Flow Charts

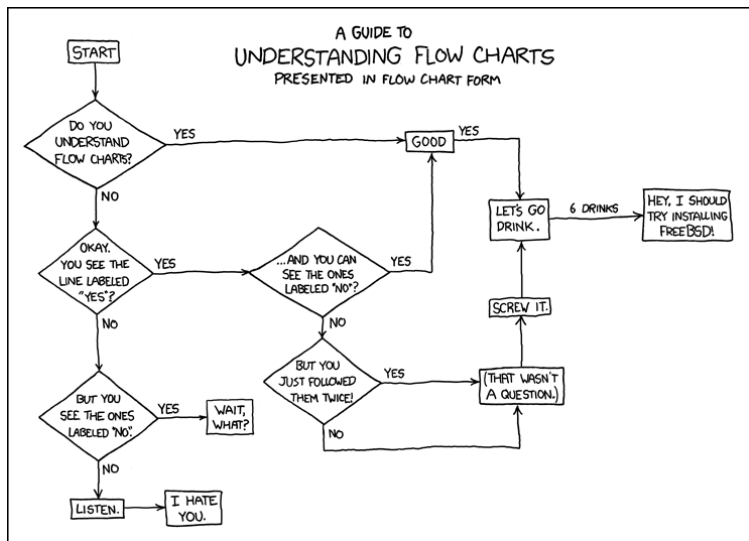

(xkcd/518)

# Today's Topics



- Recap: Decisions
- **Logical Expressions**
- Circuits
- Binary Numbers

# Challenge

*Predict what the code will do:*

```
origin = "Indian Ocean"
winds = 100
if (winds > 74):
    print("Major storm, called a ", end="")
    if origin == "Indian Ocean" or origin == "South Pacific":
        print("cyclone.")
    elif origin == "North Pacific":
        print("typhoon.")
    else:
        print("hurricane.")

visibility = 0.2
winds = 40
conditions = "blowing snow"
if (winds > 35) and (visibility < 0.25) and \
    (conditions == "blowing snow" or conditions == "heavy snow"):
    print("Blizzard!")
```

# Python Tutor

```
origin = "Indian Ocean"
winds = 100
if (winds > 74):
    print("Major storm, called a ", end="")
    if origin == "Indian Ocean" or origin == "South Pacific":
        print("cyclone.")
    elif origin == "North Pacific":
        print("typhoon.")
    else:
        print("hurricane.")

visibility = 0.2
winds = 40
conditions = "blowing snow"
if (winds > 35) and (visibility < 0.25) and \
    (conditions == "blowing snow" or conditions == "heavy snow"):
    print("Blizzard!")
```

(Demo with pythonTutor)

# Logical Operators

## and

in1		in2	<i>returns:</i>
False	and	False	False
False	and	True	False
True	and	False	False
True	and	True	True

# Logical Operators

## and

in1		in2	<i>returns:</i>
False	and	False	False
False	and	True	False
True	and	False	False
True	and	True	True

## or

in1		in2	<i>returns:</i>
False	or	False	False
False	or	True	True
True	or	False	True
True	or	True	True



# Logical Operators

## and

in1		in2	returns:
False	and	False	False
False	and	True	False
True	and	False	False
True	and	True	True

## or

in1		in2	returns:
False	or	False	False
False	or	True	True
True	or	False	True
True	or	True	True

## not

	in1	returns:
not	False	True
not	True	False

# Challenge

*Predict what the code will do:*

```
semHours = 18
reqHours = 120
if semHours >= 12:
    print('Full Time')
else:
    print('Part Time')

pace = reqHours // semHours
if reqHours % semHours != 0:
    pace = pace + 1
print('At this pace, you will graduate in', pace, 'semesters,')
yrs = pace / 2
print('(or', yrs, 'years).')

for i in range(1,20):
    if (i > 10) and (i % 2 == 1):
        print('oddly large')
    else:
        print(i)
```

# Python Tutor

```
semHours = 18
reqHours = 120
if semHours >= 12:
    print('Full Time')
else:
    print('Part Time')

pace = reqHours // semHours
if reqHours % semHours != 0:
    pace = pace + 1
print('At this pace, you will graduate in', pace, 'semesters,')
yrs = pace / 2
print('or', yrs, 'years'.)

for i in range(1,20):
    if (i > 10) and (i % 2 == 1):
        print('oddly large')
    else:
        print(i)
```


(Demo with pythonTutor)

# Today's Topics



- Recap: Decisions
- Logical Expressions
- **Circuits**
- Binary Numbers

# Circuit Demo

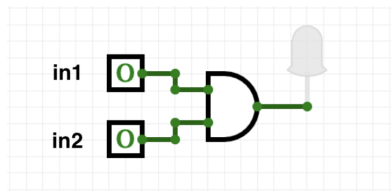


(Demo with `circuitverse`)


# Challenge

*Predict when these expressions are true:*


- `in1 or not in1:`





- `not(in1 or in2):`




- `(in1 and in2) and in3:`




# Circuit Demo



(Demo with circuitverse)



# Challenge





Draw a circuit that corresponds to each logical expression:


- $in1 \text{ or } in2$
- $(in1 \text{ or } in2) \text{ and } (in1 \text{ or } in3)$
- $(\text{not}(in1 \text{ and } \text{not } in2)) \text{ or } (in1 \text{ and } (in2 \text{ and } in3))$



# Circuit Demo



(Demo with circuitverse)



# Today's Topics



- Recap: Decisions
- Logical Expressions
- Circuits
- **Binary Numbers**

# Binary Numbers

- Logic  $\rightarrow$  Circuits  $\rightarrow$  Numbers

# Binary Numbers

- Logic  $\rightarrow$  Circuits  $\rightarrow$  Numbers
- Digital logic design allows for two states:

# Binary Numbers

- Logic  $\rightarrow$  Circuits  $\rightarrow$  Numbers
- Digital logic design allows for two states:
  - ▶ True / False

# Binary Numbers

- Logic  $\rightarrow$  Circuits  $\rightarrow$  Numbers
- Digital logic design allows for two states:
  - ▶ True / False
  - ▶ On / Off (two voltage levels)

# Binary Numbers

- Logic  $\rightarrow$  Circuits  $\rightarrow$  Numbers
- Digital logic design allows for two states:
  - ▶ True / False
  - ▶ On / Off (two voltage levels)
  - ▶ 1 / 0

# Binary Numbers


- Logic  $\rightarrow$  Circuits  $\rightarrow$  Numbers
- Digital logic design allows for two states:
  - ▶ True / False
  - ▶ On / Off (two voltage levels)
  - ▶ 1 / 0
- Computers store numbers using the Binary system (base 2)



# Binary Numbers

- Logic → Circuits → Numbers
- Digital logic design allows for two states:
  - ▶ True / False
  - ▶ On / Off (two voltage levels)
  - ▶ 1 / 0
- Computers store numbers using the Binary system (base 2)
- A **bit** (binary digit) being 1 (on) or 0 (off)


# Binary Numbers



**Example:**  $1 \times 16 + 1 \times 8 + 1 \times 1 = 16 + 8 + 1 = 25$

- Two digits: **0** and **1**


# Binary Numbers



**Example:**  $1 \times 16 + 1 \times 8 + 1 \times 1 = 16 + 8 + 1 = 25$

- Two digits: **0** and **1**
- Each position is a power of two


# Binary Numbers



**Example:**  $1 \times 16 + 1 \times 8 + 1 \times 1 = 16 + 8 + 1 = 25$

- Two digits: **0** and **1**
- Each position is a power of two
  - ▶ Decimal: the "ones", "tens", "hundreds" and so on (powers of 10)


# Binary Numbers



**Example:**  $1 \times 16 + 1 \times 8 + 1 \times 1 = 16 + 8 + 1 = 25$

- Two digits: **0** and **1**
- Each position is a power of two
  - ▶ Decimal: the "ones", "tens", "hundreds" and so on (powers of 10)
  - ▶ Binary: the "ones", "twos", "fours", "sixteens" and so on (powers of 2)


# Binary Numbers



**Example:**  $1 \times 16 + 1 \times 8 + 1 \times 1 = 16 + 8 + 1 = 25$

- Two digits: **0** and **1**
- Each position is a power of two
  - ▶ Decimal: the "ones", "tens", "hundreds" and so on (powers of 10)
  - ▶ Binary: the "ones", "twos", "fours", "sixteens" and so on (powers of 2)
- In each position the digit is either 0 or 1, so given a binary number we can obtain the decimal equivalent as follows:


# Binary Numbers



**Example:**  $1 \times 16 + 1 \times 8 + 1 \times 1 = 16 + 8 + 1 = 25$

- Two digits: **0** and **1**
- Each position is a power of two
  - ▶ Decimal: the "ones", "tens", "hundreds" and so on (powers of 10)
  - ▶ Binary: the "ones", "twos", "fours", "sixteens" and so on (powers of 2)
- In each position the digit is either 0 or 1, so given a binary number we can obtain the decimal equivalent as follows:
  - ▶ In the "ones" position we either have a 1 or not

# Binary Numbers




**Example:**  $1 \times 16 + 1 \times 8 + 1 \times 1 = 16 + 8 + 1 = 25$

- Two digits: **0** and **1**
- Each position is a power of two
  - ▶ Decimal: the "ones", "tens", "hundreds" and so on (powers of 10)
  - ▶ Binary: the "ones", "twos", "fours", "sixteens" and so on (powers of 2)
- In each position the digit is either 0 or 1, so given a binary number we can obtain the decimal equivalent as follows:
  - ▶ In the "ones" position we either have a 1 or not
  - ▶ In the "twos" position we either have a 2 or not




# Binary Numbers



**Example:**  $1 \times 16 + 1 \times 8 + 1 \times 1 = 16 + 8 + 1 = 25$

- Two digits: **0** and **1**
- Each position is a power of two
  - ▶ Decimal: the "ones", "tens", "hundreds" and so on (powers of 10)
  - ▶ Binary: the "ones", "twos", "fours", "sixteens" and so on (powers of 2)
- In each position the digit is either 0 or 1, so given a binary number we can obtain the decimal equivalent as follows:
  - ▶ In the "ones" position we either have a 1 or not
  - ▶ In the "twos" position we either have a 2 or not
  - ▶ In the "fours" position we either have a 4 or not ...

# Binary Numbers



**Example:**  $1 \times 16 + 1 \times 8 + 1 \times 1 = 16 + 8 + 1 = 25$

- Two digits: **0** and **1**
- Each position is a power of two
  - ▶ Decimal: the "ones", "tens", "hundreds" and so on (powers of 10)
  - ▶ Binary: the "ones", "twos", "fours", "sixteens" and so on (powers of 2)
- In each position the digit is either 0 or 1, so given a binary number we can obtain the decimal equivalent as follows:
  - ▶ In the "ones" position we either have a 1 or not
  - ▶ In the "twos" position we either have a 2 or not
  - ▶ In the "fours" position we either have a 4 or not ...
- **Example:**

$$11001_{base2} = 16 + 8 + 1 = 25_{base10}$$

## Challenge: Tech Interview Classic

- Write a program that prints the numbers from 1 to 100. But for multiples of three print “Fizz” instead of the number and for the multiples of five print “Buzz”. For numbers which are multiples of both three and five print “FizzBuzz”.

## Challenge: Tech Interview Classic

- Write a program that prints the numbers from 1 to 100. But for multiples of three print “Fizz” instead of the number and for the multiples of five print “Buzz”. For numbers which are multiples of both three and five print “FizzBuzz”.
- Write down the output to see the pattern:

## Challenge: Tech Interview Classic

- Write a program that prints the numbers from 1 to 100. But for multiples of three print “Fizz” instead of the number and for the multiples of five print “Buzz”. For numbers which are multiples of both three and five print “FizzBuzz”.
- Write down the output to see the pattern:

1

## Challenge: Tech Interview Classic

- Write a program that prints the numbers from 1 to 100. But for multiples of three print “Fizz” instead of the number and for the multiples of five print “Buzz”. For numbers which are multiples of both three and five print “FizzBuzz”.
- Write down the output to see the pattern:

1

2

## Challenge: Tech Interview Classic

- Write a program that prints the numbers from 1 to 100. But for multiples of three print “Fizz” instead of the number and for the multiples of five print “Buzz”. For numbers which are multiples of both three and five print “FizzBuzz”.
- Write down the output to see the pattern:

1

2

Fizz

## Challenge: Tech Interview Classic

- Write a program that prints the numbers from 1 to 100. But for multiples of three print “Fizz” instead of the number and for the multiples of five print “Buzz”. For numbers which are multiples of both three and five print “FizzBuzz”.
- Write down the output to see the pattern:

1

2

Fizz

4



## Challenge: Tech Interview Classic

- Write a program that prints the numbers from 1 to 100. But for multiples of three print “Fizz” instead of the number and for the multiples of five print “Buzz”. For numbers which are multiples of both three and five print “FizzBuzz”.
- Write down the output to see the pattern:

1

2

Fizz

4

Buzz

## Challenge: Tech Interview Classic

- Write a program that prints the numbers from 1 to 100. But for multiples of three print “Fizz” instead of the number and for the multiples of five print “Buzz”. For numbers which are multiples of both three and five print “FizzBuzz”.
- Write down the output to see the pattern:

1

2

Fizz

4

Buzz

Fizz

## Challenge: Tech Interview Classic

- Write a program that prints the numbers from 1 to 100. But for multiples of three print “Fizz” instead of the number and for the multiples of five print “Buzz”. For numbers which are multiples of both three and five print “FizzBuzz”.
- Write down the output to see the pattern:

1

2

Fizz

4

Buzz

Fizz

7

## Challenge: Tech Interview Classic

- Write a program that prints the numbers from 1 to 100. But for multiples of three print “Fizz” instead of the number and for the multiples of five print “Buzz”. For numbers which are multiples of both three and five print “FizzBuzz”.
- Write down the output to see the pattern:

1

2

Fizz

4

Buzz

Fizz

7

...

14

## Challenge: Tech Interview Classic

- Write a program that prints the numbers from 1 to 100. But for multiples of three print “Fizz” instead of the number and for the multiples of five print “Buzz”. For numbers which are multiples of both three and five print “FizzBuzz”.
- Write down the output to see the pattern:

1

2

Fizz

4

Buzz

Fizz

7

...

14

FizzBuzz

## Challenge: Tech Interview Classic

- Write a program that prints the numbers from 1 to 100. But for multiples of three print “Fizz” instead of the number and for the multiples of five print “Buzz”. For numbers which are multiples of both three and five print “FizzBuzz”.
- Write down the output to see the pattern:

1

2

Fizz

4

Buzz

Fizz

7

...

14

FizzBuzz

- Write the **algorithm** then, if time, write the code.

# Tech Interview Classic

- Write a program that prints the numbers from 1 to 100. But for multiples of three print “Fizz” instead of the number and for the multiples of five print “Buzz”. For numbers which are multiples of both three and five print “FizzBuzz”.

# Tech Interview Classic

- Write a program that prints the numbers from 1 to 100. But for multiples of three print “Fizz” instead of the number and for the multiples of five print “Buzz”. For numbers which are multiples of both three and five print “FizzBuzz”.
- To Do List:



# Tech Interview Classic

- Write a program that prints the numbers from 1 to 100. But for multiples of three print “Fizz” instead of the number and for the multiples of five print “Buzz”. For numbers which are multiples of both three and five print “FizzBuzz”.
- To Do List:
  - ▶ Create a loop that goes from 1 to 100.

# Tech Interview Classic

- Write a program that prints the numbers from 1 to 100. But for multiples of three print “Fizz” instead of the number and for the multiples of five print “Buzz”. For numbers which are multiples of both three and five print “FizzBuzz”.
- To Do List:
  - ▶ Create a loop that goes from 1 to 100.
  - ▶ If the number is divisible by 3, print “Fizz”.

# Tech Interview Classic

- Write a program that prints the numbers from 1 to 100. But for multiples of three print “Fizz” instead of the number and for the multiples of five print “Buzz”. For numbers which are multiples of both three and five print “FizzBuzz”.
- To Do List:
  - ▶ Create a loop that goes from 1 to 100.
  - ▶ If the number is divisible by 3, print “Fizz”.
  - ▶ If the number is divisible by 5, print “Buzz”.

# Tech Interview Classic

- Write a program that prints the numbers from 1 to 100. But for multiples of three print “Fizz” instead of the number and for the multiples of five print “Buzz”. For numbers which are multiples of both three and five print “FizzBuzz”.
- To Do List:
  - ▶ Create a loop that goes from 1 to 100.
  - ▶ If the number is divisible by 3, print “Fizz”.
  - ▶ If the number is divisible by 5, print “Buzz”.
  - ▶ **If divisible by both, print “FizzBuzz”.**

# Tech Interview Classic

- Write a program that prints the numbers from 1 to 100. But for multiples of three print “Fizz” instead of the number and for the multiples of five print “Buzz”. For numbers which are multiples of both three and five print “FizzBuzz”.
- To Do List:
  - ▶ Create a loop that goes from 1 to 100.
  - ▶ If the number is divisible by 3, print “Fizz”.
  - ▶ If the number is divisible by 5, print “Buzz”.
  - ▶ **If divisible by both, print “FizzBuzz”.**
  - ▶ Otherwise print the number.

# Tech Interview Classic

- Write a program that prints the numbers from 1 to 100. But for multiples of three print “Fizz” instead of the number and for the multiples of five print “Buzz”. For numbers which are multiples of both three and five print “FizzBuzz”.
- To Do List:
  - ▶ Create a loop that goes from 1 to 100.
  - ▶ If the number is divisible by 3, print “Fizz”.
  - ▶ If the number is divisible by 5, print “Buzz”.
  - ▶ **If divisible by both, print “FizzBuzz”.**
  - ▶ Otherwise print the number.

*Order matters!!! To print FizzBuzz when  $i$  is divisible by both it should be checked first, otherwise it will never get to this case!*

# Tech Interview Classic

- Write a program that prints the numbers from 1 to 100. But for multiples of three print “Fizz” instead of the number and for the multiples of five print “Buzz”. For numbers which are multiples of both three and five print “FizzBuzz”.
- To Do List (**Reordered**):

# Tech Interview Classic

- Write a program that prints the numbers from 1 to 100. But for multiples of three print “Fizz” instead of the number and for the multiples of five print “Buzz”. For numbers which are multiples of both three and five print “FizzBuzz”.
- To Do List (**Reordered**):
  - ▶ Create a loop that goes from 1 to 100.
  - ▶ **If divisible by both 3 and 5, print “FizzBuzz”.**



# Tech Interview Classic

- Write a program that prints the numbers from 1 to 100. But for multiples of three print “Fizz” instead of the number and for the multiples of five print “Buzz”. For numbers which are multiples of both three and five print “FizzBuzz”.
- To Do List (**Reordered**):
  - ▶ Create a loop that goes from 1 to 100.
  - ▶ **If divisible by both 3 and 5, print “FizzBuzz”.**
  - ▶ If the number is divisible by 3, print “Fizz”.
  - ▶ If the number is divisible by 5, print “Buzz”.
  - ▶ Otherwise print the number.
  - ▶ Also should print a new line (so each entry is on its own line).

# Tech Interview Classic

- To Do List:
  - ▶ Create a loop that goes from 1 to 100.
  - ▶ If divisible by both 3 and 5, print “FizzBuzz”.
  - ▶ If the number is divisible by 3, print “Fizz”.
  - ▶ If the number is divisible by 5, print “Buzz”.
  - ▶ Otherwise print the number.
  - ▶ Also should print a new line (so each entry is on its own line).

# Tech Interview Classic

- To Do List:

- ▶ Create a loop that goes from 1 to 100.
- ▶ If divisible by both 3 and 5, print “FizzBuzz”.
- ▶ If the number is divisible by 3, print “Fizz”.
- ▶ If the number is divisible by 5, print “Buzz”.
- ▶ Otherwise print the number.
- ▶ Also should print a new line (so each entry is on its own line).

```
for i in range(1,101):
```

# Tech Interview Classic

- To Do List:

- ▶ Create a loop that goes from 1 to 100.
- ▶ If divisible by both 3 and 5, print "FizzBuzz".
- ▶ If the number is divisible by 3, print "Fizz".
- ▶ If the number is divisible by 5, print "Buzz".
- ▶ Otherwise print the number.
- ▶ Also should print a new line (so each entry is on its own line).

```
for i in range(1,101):  
    if i%3 == 0 and i%5 == 0:  
        print("FizzBuzz")
```

# Tech Interview Classic

- To Do List:

- ▶ Create a loop that goes from 1 to 100.
- ▶ If divisible by both 3 and 5, print "FizzBuzz".
- ▶ If the number is divisible by 3, print "Fizz".
- ▶ If the number is divisible by 5, print "Buzz".
- ▶ Otherwise print the number.
- ▶ Also should print a new line (so each entry is on its own line).

```
for i in range(1,101):  
    if i%3 == 0 and i%5 == 0:  
        print("FizzBuzz")  
    elif i%3 == 0:  
        print("Fizz")
```

# Tech Interview Classic

- To Do List:

- ▶ Create a loop that goes from 1 to 100.
- ▶ If divisible by both 3 and 5, print "FizzBuzz".
- ▶ If the number is divisible by 3, print "Fizz".
- ▶ If the number is divisible by 5, print "Buzz".
- ▶ Otherwise print the number.
- ▶ Also should print a new line (so each entry is on its own line).

```
for i in range(1,101):  
    if i%3 == 0 and i%5 == 0:  
        print("FizzBuzz")  
    elif i%3 == 0:  
        print("Fizz")  
    elif i%5 == 0:  
        print("Buzz")
```

# Tech Interview Classic

- To Do List:

- ▶ Create a loop that goes from 1 to 100.
- ▶ If divisible by both 3 and 5, print "FizzBuzz".
- ▶ If the number is divisible by 3, print "Fizz".
- ▶ If the number is divisible by 5, print "Buzz".
- ▶ Otherwise print the number.
- ▶ Also should print a new line (so each entry is on its own line).

```
for i in range(1,101):
    if i%3 == 0 and i%5 == 0:
        print("FizzBuzz")
    elif i%3 == 0:
        print("Fizz")
    elif i%5 == 0:
        print("Buzz")
    else:
        print(i)
```

# Recap



- In Python, we introduced:



# Recap



- In Python, we introduced:
  - ▶ Decisions
  - ▶ Logical Expressions
  - ▶ Circuits
  - ▶ Binary Numbers

# Reminders!



Before next class, don't forget to:

- Review this class's Lecture and Lab

# Reminders!



Before next class, don't forget to:

- Review this class's Lecture and Lab
- Take the Lab Quiz on Gradescope by 9pm Today

# Reminders!



Before next class, don't forget to:

- Review this class's Lecture and Lab
- Take the Lab Quiz on Gradescope by 9pm Today
- Submit this class's 5 programming assignments (programs 21-25)